



## COMPRESSION TYPE PUSH-ON-CONNECTOR

*For indoor use*

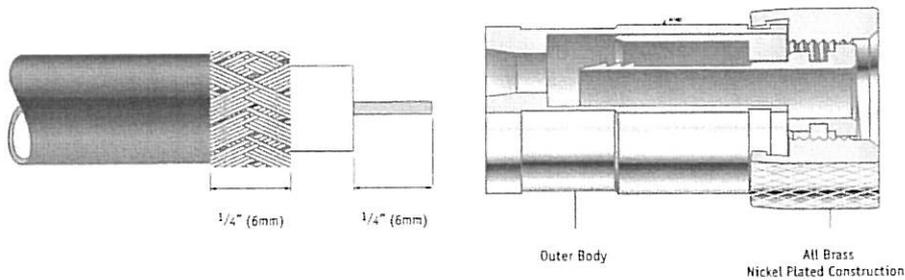

### Operation Specification:

<b>Bandwidth:</b>	0 MHz – 3 GHz
<b>Impedance:</b>	75 Ohms (nominal)
<b>Return Loss:</b>	Minimum -30 dB @ 3 GHz
<b>Tightening Torque:</b>	30 in-lbs.
<b>Operating Temperature Range:</b>	-40° F to +140° F
<b>Cable Range:</b>	60% through tri shield, PE and PVC jackets
<b>Cable Retention:</b>	60% braid – 50 pounds minimum
<b>Tooling Requirements:</b>	None
<b>Other Available Sizes:</b>	SPP-59 – RG-59 60% through tri shield, PE and PVC jackets SPP-6Q – RG-6 Quad Shield, PE and PVC jackets SPP-12 – RG-6 Size European cable,

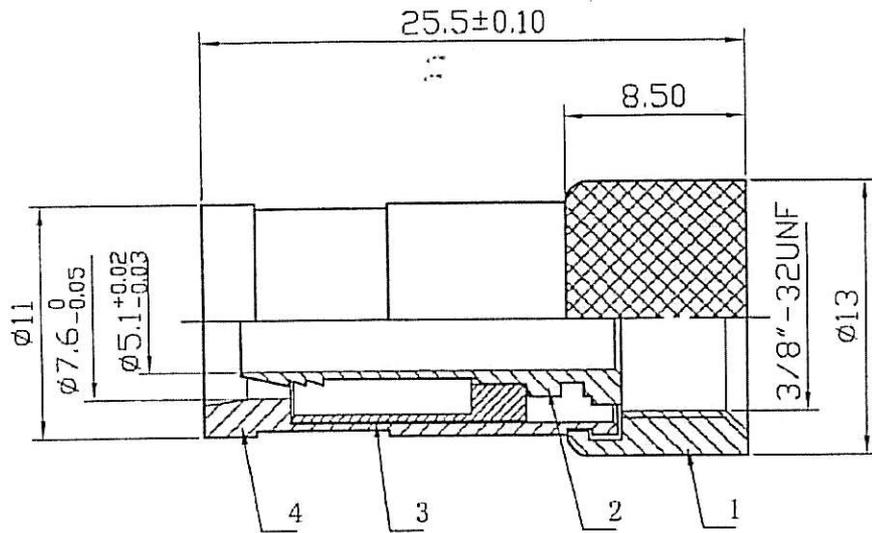

4	Bushing	Brass	Nickel plating
3	Body	Brass	Nickel plating
2	Mandrel	Brass	Nickel plating
1	Nut	Brass	Nickel plating
No.	Description	Material	Finish